BAN: COVID-19 Response Emergency Assistance Project

ADB Project 54173-001| Loan3918-BAN

ENVIRONMENTAL MANAGEMENT PLAN

Package

Package No. MUGDHA/ICU/ADB/WD-2: Construction of 50 bed Isolation Units and 10 bed ICU/CCU at Mugdha 500 bed General Hospital. (Lot 1: Civil Works atMugdha 500 bed General Hospital)

Implementing Agency

Health Services Division (HSD)

Ministry of Health and Family Welfare

September 2021

Prepared by Health Services Division (HSD) of the Ministry of Health and Family Welfare for the Asian Development Bank.

The Environmental Management Plan is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature.

TABLE OF CONTENTS

l.	PROJECT BACKGROUND	2
II.	SUBPROJECT DESCRIPTION	3
III.	BASELINE INFORMATION	4
IV.	ENVIRONMENTAL MANAGEMENT PLAN	5
APP	ENDIX-1: LAYOUT PLAN OF SUBPROJECT COMPONENTS	.14
APP	ENDIX-2: SAMPLE MEDICAL WASTE MANAGEMENT PLAN	.15
APP	ENDIX-3: COVID HEALTH AND SAFETY PLAN FOR THE CONSTRUCTION WORK	.20
	LIST OF TABLES	
Tabl	e 1: Environmental Management Plan for Isolation Unit and CCU at Mugdha	8
Tabl	e 2: Cost Estimation for EMP Implementation	.12
	LIST OF FIGURES	
Figu	re 1: Mugdha Medical College Hospital (Mugdha)	4

I. PROJECT BACKGROUND

- 1. COVID-19 is a new disease with similar symptoms as influenza but different in terms of severity and community transmission¹. The World Health Organization (WHO) declared the COVID-19 as a Public Health Emergency of International Concern on 30 January 2020 under the International Health Regulations (IHR) 2005 and recognized it as a pandemic on 11 March 20202². On 23 March 2020, the Government of Bangladesh requested ADB for a support in its preparedness and response to the COVID-19 outbreak. Accordingly, ADB approved a loan of \$100 million from its ordinary capital concessional resource for Loan 3918 –BAN(COL): COVID-19 Response Emergency Assistance Project (the project) on 30 April 2020. The loan agreement was signed on 13 May 2020 and became effective on 16 May 2020. The loan completion date is 31 October 2023. The Health Services Division (HSD) of the Ministry of Health and Family Welfare is the executing agency (EA) and the Directorate of Health Services (DGHS) is the implementing agency (IA) of the project.
- 2. The project will support the procurement of equipment and supplies, the upgrading of health and testing facilities, and build system and community capacities for surveillance, prevention and response to COVID-19. The project's outcome will be the improved Health and wellbeing of COVID-19 affected persons. The project will have three outputs: (i) Output 1: Immediate and urgent needs are met in prevention and control of COVID-19; (ii) Output 2: Infrastructure and related equipment are delivered to support and sustain prevention and management of COVID-19; and (iii) Output 3: Health system and community capacities in combatting COVID-19 are strengthened. In particular, the project will involve civil works supporting the upgrade/extension of existing facilities for the establishment of (i) screening and quarantine areas at points of entry; (ii) critical care and isolation units in existing healthcare facilities; (iii) microbiological diagnostics facilities in existing medical colleges and hospitals across the country.

¹WHO Coronavirus disease (COVID-19) is an infectious disease caused by a newly discovered coronavirus. https://www.who.int/health-topics/coronavirus#tab=tab 1.

²WHO. International Health Regulations (2005). 3rd Ed. https://www.who.int/ihr/publications/9789241580496/en.

II. SUBPROJECT DESCRIPTION

- 3. In order to ensure modern medical services to the people of Dhaka and nearby districts and to keep pace with the growing population, to acquire and implement plans to set up a medical college and hospital in Dhaka. Mugda Medical College is a newly established public Medical College inside the Dhaka Metropolitan city. Apart from the Medical College, a general hospital comprising of 500 beds is fully open, for which construction was began in 2006. In 2015 named as Mugda Medical College & Hospital. This institution has started academic journey by admitting 1st batch since 2015-2016. Currently a total number of 150 students are being enrolled in the Medical College, which includes students of the academic year 2015-2016, 2016-2017 and 2017-2018. The decision of establishing this medical college is a timely step towards providing quality services to the general allied population, 300 teachers were appointed for conducting academic activities and as well as hospital services. There are about 27 clinical departments and 8 preclinical and Para clinical departments are ruled by experienced teachers and physicians. The hospital runs big outpatient along with specialist consultation like; Medicine, Pediatrics, Psychiatry, skin and venereal diseases, Clinical Pathology, General surgery, Otorhinolaryngology, Pediatric Surgery, Ophthalmology, Obstetrics, Gynecology, Radiotherapy, Radiology and Dentistry. There are in an average 1000 patients are attend in outpatient departments and 500-550 patients are admitted in Inpatient department a day.
- 4. Land area of the college campus is 10.2 Acres. As years passed, new treatment facilities kept being added and at present a Coronary care unit, Intensive care unit, a kidney dialysis unit, a Model Family Planning Centre, a Centre for Extended Program for Immunization (EPI), DOT'S center are among the many facilities available to the in- and outpatients. Land area of the college campus is 10.2 Acres. Total 30 departments are running in the College and Hospital. Every year 100 intern doctors from different medical college are working in this hospital. From this Hospital the under privileged population receiving medical services at comparatively less prices. Along these, this medical college and hospital is aimed to build human force includes expert physicians and academicians³.
- 5. Mugda Medical College Hospital (MMCH) is start conducting coronavirus test from the very beginning of coronavirus outbreak in Bangladesh, since April 2020. The test lab was formally inaugurated at the Microbiology department and the treatment of the Coronavirus patient also started in the hospital and physicians and Doctors have been trained in thisregard⁴. However, there are some waste collection bins placed inside the hospital but it is recommended to enhance the number and to use separate and labeled colored bins to store the medical wastes as well as to handle them with care and to dump in marked places through securing proper safety measures.

⁴https://www.thedailystar.net/frontpage/news/all-set-covid-jab-roll-out-2033837

³https://www.mumc.gov.bd/

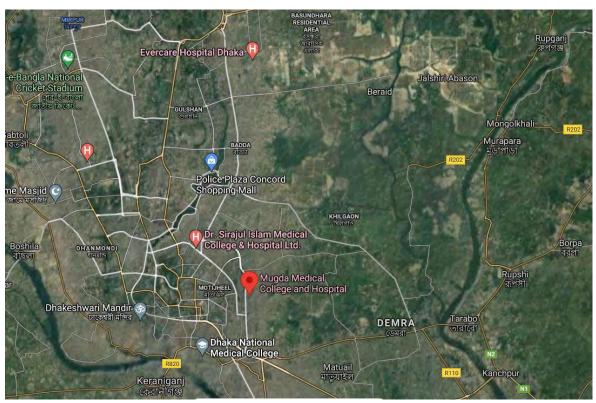


Figure 1: Mugdha Medical College

6. Under this subproject, 50 Isolation Unit and 10 Bed CCU will be established in Mugdha Medical College Hospital. Appendix 1 represents the layout plan of subproject components (10 bed CCU and 50 bed isolation). The isolation and CCU units will be arranged within the constructed buildings (2nd floor of the existing hospital building); so no further additional vertical or horizontal or a new construction is required for this purpose. Only few civil works related to portioning, floor improvement and other required works will be conducted under this package. The respective medical authority will provide necessary support and supervision and the monitoring process will be done through Public Works Department (PWD). A small amount of waste will be generated during construction period and medical wastes will be produced during operation phase of the subproject. The handling procedures of these medical wastes along with other waste are included in Appendix 2.

III. BASELINE INFORMATION

- 7. **Climate.**Dhaka has a tropical savanna climate. The city has a distinct monsoonal season, with an annual average temperature of 26°C (79°F) and monthly means varying between 19°C (66°F) in January and 29°C (84°F) in May. Approximately 87% of the average annual rainfall of 2,123 millimeters (83.6 inches) occurs between May and October. Increasing air and water pollution emanating from traffic congestion and industrial waste are serious problems affecting public health and the quality of life in the city. Water bodies and wetlands around Dhaka are facing destruction as these are being filled up to construct multi-storied buildings and other real estate developments. Coupled with pollution, such erosion of natural habitats threatens to destroy much of the regional biodiversity. Due to unregulated manufacturing of brick and other causes Dhaka is one of the most polluted world cities with very high levels of PM2.5 air pollution.
- 8. **Air Quality and Noise**. In 2019, Dhaka came in with a PM2.5 reading of 83.3 μ g/m³ as the yearly average, putting it in the 'unhealthy' bracket of air quality, which requires a PM2.5 reading between 55.5 to 150.4 μ g/m³ to be classed as unhealthy. Besides just being a classification, this rating is of course indicative that the air quality is indeed unhealthy to breathe, with numbers going well above the yearly average such as January coming in with a record high of 181.8 μ g/m³, putting it into the 'very unhealthy' bracket (150.5 to 250.4 μ g/m³).
- 9. This yearly average reading of $83.3 \,\mu\text{g/m}^3$ was enough to put Dhaka in 1st place out of all cities in Bangladesh (of note is that the only city registered for pollution levels in the country was Dhaka, so this first-place ranking was inevitable) as well as being the 21st most polluted city worldwide in 2019, making the level of air pollution in Dhaka quite severe, and of great detriment to its citizens.
- 10. The highest noise level recorded 104 dB at Sayedabad bus terminal and the lowest 68 dB in Banani and Baridhara residential area. In silent zone of DMC, average noise level was 79 dB, in residential zone 72 dB, in commercial zone 90 dB, and in mixed zone average noise level was recorded at 91 dB.
- 11. **Drinking Water Quality.**The quality of water, from both surface and groundwater sources, has recently being endangered by many factors, natural and man-made, which have caused a deterioration. The quality of the water sources used in Bangladesh is at high risk, especially in the capital city of Dhaka, due to increased pollution resulting from unlimited migration of rural people. Consequently, the existing groundwater-based water supply system is not adequate to fulfil the water demand of the mega-city Dhaka. To alleviate the city's present severe water crisis, the question has been asked as to why the Dhaka Water Supply and Sewerage Authority (DWASA) is not using the rivers around Dhaka as a source of water. In this context, DWASA is seriously considering two options: (i) introduction of a separate water supply system for domestic purposes other than drinking water by pumping available river water around the city; and (ii) installation of a small-scale treatment plant for water supply using river water around the city as a source of raw water.
- 12. **Current Situation of Medical Waste Management:**waste management and practices were found to be quite unsafe. Poor people collect the waste and sell it for recycling. Almost 85.0% of sharp injuries are caused between their usage and subsequent disposal. More than 20.0% of those who handle them encounter "stick" injuries. Another study showed that people use an average of 3.4 injections per year, in which 39.3% were administered with reusedequipment for low level of management. There is no initiative for present MWM system by government or INGOs, and no concrete regulation has been established yet. Few researchers and INGOs have done little. Women and children are more vulnerable because they handle the waste with bare hands; exposing them to contamination with HIV or hepatitis B and other diseases. Therefore, it is essential to follow sound medical waste management system and take actions for this public health problem⁸.

IV. ENVIRONMENTAL MANAGEMENT PLAN

- 13. Environmental Management Plan (EMP) is an instrument for implementing the mitigation plan for the proposed subproject. The plan provides guidance regarding environmental and social issues/parameters, location, frequency, and means of management and mitigation. The EMP specifies the means through which adverse environmental and social impact of the project associated with preconstruction, construction, and operational activities of the subproject are either avoided or mitigated.
- 14. The basic objective of the EMP is to manage the adverse impacts of proposed project interventions in a way that minimizes the adverse impact on the environment and people at the subproject sites. The specific objectives of the EMP are to
 - Identification of the environmental impacts and recommended mitigation and enhancement measures:
 - Define the responsibilities of the subproject proponents in accordance with the project phases (pre-construction, construction and operation);
 - Facilitate the implementation of the mitigation measures by providing the technical details of each project impact;
 - Define a monitoring mechanism and identify monitoring parameters to ensure that all proposed mitigation measures are completely and effectively implemented;
 - Providing a cost estimate for EMP implementation.
- 15. For civil works, the Contractor will be required to prepare a Site Specific EMP based on this EMP and submit to PIU for approval; carry out all of the monitoring and mitigation measures set forth in the approved SEMP. The SEMP will be implemented for impact management during subproject construction and operation.
- 16. **Implementation Arrangements:** MOHFW will be the executing agency (EA) while DGHS will be the implementation agency (IA). The project is expected to be completed by April 2023. A project implementation unit (PIU) will be set up in DGHS to provide the technical, administrative, and logistical support necessary for implementation. An inter-ministerial Project Steering Committee is to be constituted under the project of DGHS under the chairmanship of the Secretary, MOHFW, will provide guidance on policy directions and oversee the overall project implementation. The PIU will work directly with the government entity involved in each activity, such as but not limited to: (i) the COVID-19 Emergency Operation Center (EOC) in preparedness and response; (ii) the various coordination committees at Divisional, District, City Corporation and Upazila levels for civil works activities; and (iii) the Institute of Epidemiology, Disease Control and Research (IEDCR) and other relevant institutes under DGHS in contact tracing support and surveillance strengthening activities. The PIU will conduct regular monitoring and evaluation activities and hold quarterly reviews of progress against the indicators. For technical oversight and hands-on support to the PIU for ensuring environmental safeguards, an intermittent environmental specialist will be appointed throughout project implementation up to completion.
- 17. The contractor will designate their environmental staff who will be responsible in overseeing the implementation and compliance to the EMP during construction phase and maintain a record of complaint/grievance submitted at the project level through the contractor including any actions taken to address the issue. Contractors will also follow the guidelines for COVID-19 preparedness provided in Appendix3.
- 18. **Grievance Redress Mechanism (GRM):** MOHFW will ensure that affected persons will have the chance to express their legitimate grievances or to file a complaint about the project by setting up a Grievance Redress Mechanism (GRM) as soon as the loan becomes effective. The GRM shall resolve complaints in a time-bound and transparent manner. The GRM process will be aligned with the process adopted by MOHFW, while ensuring compliance with the policy principles of ADB SPS 2009. Any cost related to the implementation of the GRM will be part of the administration cost borne by MOHFW. Grievances filed and resolved will be thoroughly documented and included in the monitoring reports submitted to ADB.

19. Complainants or affected persons can seek redress to their complaints in three levels: Level 1: The complaint will be resolved at the activity level through the Site Engineer or Representative by the Contractor within one to two working days and advise the Complainant accordingly. Level 2: The GRM Focal Person will assist the complainant in elevating the complaint to the PIU. The PIU will address the grievance within 7 days through continuous interactions with the complainant to answer queries and resolve the complaint. Level 3: In the event the complainant is not satisfied with the decision after the GRM, the Complainant can access the ADB's Accountability Mechanism (ADB's Office of Special Project Facility or Office of Compliance Review).

Table 1: Environmental Management Plan for Isolation Unit and CCU at Mugdha 500 Bed Hospital

		Monitoring Method		Responsibility		
IEC	Potential Impact	Mitigation Measures	Method of Collecting and Reporting Data	Location and Frequency	Implementation	Supervision
CONSTRUCTION	PHASE					
Waste Management for Construction and COVID Waste	 Soil, water and air pollution from the improper management of wastes and excess materials from the construction sites. The discarded PPE has posed serious health hazards and can spread the contagion among cleaners and walkers. 	 Develop a waste management plan including COVID waste by the help of the environmental consultant and later to update the plan, if required. Use of colored bins (like yellow) and to put medical wastes in 2-3 layered plastic bag. These wastes need to disinfectant first using chlorine or any other germicides and then safely transport them through marked vehicles in a marked place. Waste segregation, packaging, collection, storage disposal, and transport will be conducted in compliance with GOB, ADB and WHO COVID-19 Guidelines. Train on correct use and disposal of PPEs and check that they understand. Construction wastes (such as piece of rod, wood, bamboo, tin sheet, brick etc.) shall be kept in designated area and sprayed water mist to reduce the dust. Use PPE for staff handling any hazardous materials seepage of hazardous chemicals in case of any accidental spills. Do not burn/throw in any wastes to the waterbodies/drains. The PIU will audit any off-site waste disposal required on a monthly basis and institute any remedial measures required to ensure compliance. 	Record of wastetype and quantity and the disposal method	Construction camp and work sites during construction period	Contractor	PIU and Environmental Consultant (ES)
Management of Workers Facility	Lack of proper facilities such as water supply and sanitation facilities may pose health hazards to workers.	 Ensure sufficient stock of soap, sanitizer, washing facility and safe water at work site. Also, provision of an appropriate number of toilets and hand-washing points. At the entrance of the worksite every personnel must wash their hands for 20 second with maintaining a distance of at least 6ft from each other. Check the availability of medical kits at the site on weekly basis. Preparation of daily routine checkup including temperature screenings of the workers and staff. 	 Visual inspection &consultation with worker; Health checkup record. 	Construction camp site during construction period	Contractor	PIU and ES
Drinking Water Quality	Groundwater at shallow depths may be contaminated with arsenic and other parameters and hence not suitable for drinking purposes.	 Provide the drinking water that meets national standards. Select aquifers for drinking water free from arsenic and other contaminants. Tube wells will be installed with due regard for surface environment, protection of groundwater from surface contaminants, and protection of aquifer cross contamination. Sanitary waste should be adequately disposed-off to avoid groundwater contamination. 	Record of water- borne diseases	Regular monitoring the drinking water source during construction period	Contractor	PIU and ES
Drainage Congestion	Waterlogging due to improper management of drainage for rainwater/liquid waste or wastewater.	 Regularly inspect and maintain all drains to assess and alleviate any drainage congestion problem. Stockpile materials away from drainage lines. Reconstruct internal road-side drains immediately if damaged by any activities. 	Visual inspection & consultation with hospital staff and visitors.	In the project area during construction period	Contractor	PIU and ES
Dust/Air Quality Management	 Dust generation from construction sites, material stockpiles specially earth material stockpiles and access roads is a nuisance in the environment and can be a health hazard. 	 During pneumatic drilling/wall destruction dust shall be suppressed by ongoing water spraying and/or installing dust screen enclosures at site. Water spraying the material stockpiles and access roads when and as required basis to minimize the potential for environmental nuisance due to dust. Increase the watering frequency during periods of high risk (especially during the dry period and high winds). Cover haul vehicles carrying dusty materials moving outside the construction site. 	Visual inspection &consultation with hospital staff, doctors, patients and their relatives	On the worksite Weekly monitoring during construction period	Contractor	PIU and ES

### Additional Contraction works and impact				Monitoring N		Respons	ibility
Nose may have an impact on workers, patients, hospital stalfs, local residents for workers, patients, hospital stalfs, local residents for workers, patients, hospital stalfs, local residents for educe notes for each patient of workers, patients, hospital stalfs, local residents for educe notes for expert in order to deep it in good working order in accordance with manufactures maintenance procedures. Occupational Hodith and safety increased in the control of the stalf throughout the construction workers in the immodiate working manufactures maintenance procedures. Perspect the health and safety influence and occupational Health and safety influence and patients and dealths, lead of first and and health care a facilities in the immodiate widney. Health is of construction workers and patients are stalf to the worker south as safety guidance for COVID-19 of work in the stalf and safety in the immodiate working and other safety stalf in the immodiate working and other safety stalf in a real ways supplied with clean water soon, and disinfection. Provide safety for the analysis of the control of the stalf and safety in the local patients and manufactures and manufactures and manufactures and manufactures and the residents and manufactures and manufactures and manufactures maintenance procedures. Provide resident of the virus at RMCH: Workers immodiately and other safety guidance for COVID-19 of workers such as safety shows, safety helmes, face masks, hand gives protective clothing, applies, full face eye sheles, and earn page of the page of	IEC	Potential Impact	Mitigation Measures			Implementation	Supervision
workers, patients, hospital staffs, local residents etc. local re			devices.				
Health and safety risks o construction workers that alternation to worker health and safety procedures and deaths. Lack of first and and health care activities in the immediate vicinity. Health risk of construction workers that may cause severe injuries and deaths. Lack of first and and health care activities in the immediate vicinity. Health risk of construction workers due to COVID-19. Health risk of construction workers due to COVID-19. Workers involved for any short renovation activities at isolation area for COVID-19 will have WHO certified PPE and subsequently dispose the PPE in designated giroses. Provide PPE to workers such as safety shoes, safety helmels, face masks, hand gloves, protective clothing, goggles, full face eye shelds, and ear plugs and monitor to maintain them. Ensure hand washing and other sanitary stations are always supplied with clean water, soap, and disinfectant: Provide safety measures as appropriate during works such first aid kills, restricted access zones, warning signs, overhead protection against falling debris, lighting system to protect community, hospital staff, and patients against falling debris, lighting system to protect community, hospital staff, and patients against falling debris, lighting system to protect community, hospital staff and patients against falling debris, lighting system to protect community, hospital staff, and patients against falling debris, lighting system to protect community, hospital staff, and patients and their relatives. Site access zones, warning signs, overhead protection against falling debris, lighting system to protect community, hospital staff, and patients and their relatives. Site access zones, warning signs, overhead protection against falling debris, lighting system to protect community, hospital staff and patients and their relatives. Site access zones warning signs, fire extinguishers, fire extinguishers, fire extinguishers, fire extinguishers, fire extinguishers, fire extinguishers rehabilitated. **Visual inspection &	Vibration Management	workers, patients, hospital staffs, local residents etc.	 workers, patients, hospital staffs, local residents etc. Install temporary noise barriers by screen, tin, wood around generators to reduce noise levels. Employ best available work practices on-site to minimize occupational noise levels. Use ear plugs in noisy areas of the construction activities. Maintain all equipment in order to keep it in good working order in accordance with manufactures maintenance procedures. 	consultation with hospital staff, doctors, patients and their relatives	Weekly monitoring during construction period		
Reinstatement excess construction materials. construction and camp sites; consultation with local people period construction	Health and	health and safety risks to construction workers that may cause severe injuries and deaths. Lack of first aid and health care facilities in the immediate vicinity. Health risk of construction workers	 competent and consistent attention to worker health and safety throughout the construction phase. Prepare the health and safety guidance for COVID-19 at work sites and get approval from PMU, and strictly follow the guidance at worksite; Any worker showing symptoms of respiratory illness (fever, cold or cough) and has potentially been exposed to COVID-19 should be immediately removed from the site and tested for the virus at RMCH; Workers involved for any short renovation activities at isolation area for COVID-19 will have WHO certified PPE and subsequently dispose the PPE in designated areas. Provide PPE to workers such as safety shoes, safety helmets, face masks, hand gloves, protective clothing, goggles, full face eye shields, and ear plugs and monitor to maintain them. Ensure hand washing and other sanitary stations are always supplied with clean water, soap, and disinfectant; Provide safety measures as appropriate during works such first aid kits, restricted access zones, warning signs, overhead protection against falling debris, lighting system to protect community, hospital staff and patients against construction risks. Simple poster/signage in Bangla explaining entry procedures, wearing masks and wash hands before entering/leaving. Emergency preparedness and response procedures and equipment (warning signs, fire extinguishers, fire exit etc.). Train all construction workers in OHS matters, and on the specific hazards of their work and maintain a register of the person present during the training. Grievance Redress mechanism (GRM) developed to readdress complaints raised 	consultation with hospital staff, doctors, patients and their relatives Record of accidents Obtain record of training Provision of regular temperature check, using disinfectants and also provision of time-to-time hand wash are required to limit the COVID-	office and work site during construction	Contractor	PIU and ES
All affected structures rehabilitated. local people period			• Remove all spoils wreckage, rubbish, or temporary structures from the	· ·		Contractor	PIU and ES
						_	_

			Monitoring N	Method	Responsibility	
IEC	Potential Impact	Mitigation Measures	Method of Collecting and Reporting Data	Location and Frequency	Implementation	Supervision
COVID Waste Management	COVID waste has posed serious health hazards and can spread the contagion among hospital staff, waste handlers and the community.	 Prepare medical waste management plan that will cover the waste generated from the response to the COVID-19 infection. The plan will follow ADB's guidance note on managing medical waste during COVID-19 pandemic as well as any other government regulations. All medical waste produced during the care of COVID-19 patients must be considered as infectious waste and should be segregated and collected safely in designated colored coded containers. Use of colored bins (like yellow) and to put Covid wastes in 2-3 layered plastic bag. These wastes need to disinfectant first using chlorine or any other germicides and then safely transport them through marked vehicles in a marked place. Waste segregation, packaging, collection, storage disposal, and transport will be conducted in compliance with WHO COVID-19 Guidelines. Train the staffs on color coding and handling of infectious Covid wastes. 	 Visual inspection and consultation with hospital staff and cleaners. Record ofwaste type and quantity and the disposal method. 	Hospital area especially in COVIDward during operation period	MUGDHA	DGHS
Medical Waste Management	 Poor management of medical waste exposes healthcare workers, waste handlers and the community to infections, toxic effects and injuries. Soil, water and air pollution from the improper management of wastes generated from the facility. 	 Provision of color coded, covered receptacles in strategic positions of the facility for separate categories of waste and regular cleaning of waste bins. Labels showing the type of waste that should be disposed of in each container should be placed near to the bins to guide staff and reinforce good habits. Medical wastes generated in the hospital will be treated by in-house facility and then this treated wastes will be disposed of as per a pre-determined SOP in accordance with international good practices. Transport the medical waste with covered vehicle. The records of waste disposal will be maintained as proof for proper management as designed. Ensure necessary PPE (gown, gloves, face mask, goggles or face shield, gumboots) is provided to all staffs, as required and ensure them to wear PPE when handling and disposing waste according to national and WHO guideline. Do not burn the wastes openly or throw in to waterbodies or do not dispose on soil. Audit for any off-site waste disposal will be required on a monthly basis and institute any remedial measures required to ensure compliance. 	Visual inspection and consultation with hospital staff and cleaners. Record ofwaste type and quantity and the disposal method.	Hospital area during operation period	MUGDHA	DGHS
Occupational Health and Safety including COVID H&S	 Needle-sticks, surgical cuts, and other injuries posing transmission risk of blood-borne diseases such as COVID-19, Hepatitis C, HIV-AIDS, etc. Dermatitis and allergic reactions due to workplace exposures. 	 Prepare a health and safety guidance for COVID-19 and strictly follow the guidance at the facility. Refer to IFC EHS Guidelines for Healthcare Facilities (2007) and relevant national guidelines and protocols. Implement suitable safety standards for all workers and facility visitors. Mandatory use of personal protective equipment and safety gears, where required. Arrangements for safe drinking water and sanitation facilities. Provide regular OHS training to healthcare workers. Provide incentives to staff and create a work-life balance in work schedule. 	Regular inspection and testing of all safety features and hazard control measures and personal protective features	Hospital area during operation period	MUGDHA	DGHS
Accidental Releases of Gas	Leakage of infectious or hazardous substances may pose	Develop an Emergency Response Plan and follow strictly during emergency incident.	 Record of regular inspection. 	Hospital area during operation	MUGDHA	DGHS

		Mitigation Measures	Monitoring Method		Responsibility	
IEC	Potential Impact		Method of Collecting and Reporting Data	Location and Frequency	Implementation	Supervision
and Fluids	serious health hazards and can spread the contagion among hospital staff and patients, cleaners etc.			period		

20. **EMP Budget:** The contractor should develop a site-specific Occupational Health and Safety Plan following ADB COVID-19 guidelines to ensure competent and consistent attention to worker health and safety throughout the construction phase and it is also suggested to maintain a medical waste management plan for the operation period. The possible mitigation measures of handling medical waste have also been suggested in the EMP. The EMP budget would also include the training cost. The contractor will arrange training for associated personnel and workers during construction phase. These training sessions will include knowledge on the environmental management system, health and safety, emergency response, etc. The EMP implementation cost for of this package has been calculated and given in Table 2.

Table 2: Cost Estimation for EMP Implementation

Mitigation and Monitoring Items	Unit	Cost/Unit	Total Unit	Total Cost
1. Workers Health and Safety				
Safety Vest	Nos.	270	10	2700
Helmet	Nos.	350	10	3500
Safety shoes	Nos.	430	10	4300
Safety Goggles	Nos.	280	10	2800
Hand Sanitizer (5 Liter)	Nos.	2600	3	7800
One time Face Mask	Nos.	500	4	2000
Thermometer for measuring body temperature	Nos.	1000	2	2000
Fire extinguisher	Nos.	1299	2	2598
Megaphone Handheld Loudspeaker	Nos.	2700	1	2700
First Aid Box	Nos.	2500	1	2500
Torch Light	Nos.	1090	2	2180
Sub-total excluding over-head & profit =				35078
Sub-total Including over-head & profit =				39813.53
Add VAT with adjustment factor (VAT-7.5% &Factor-1.08108)				3228.12
Total for item 1 including over-head, profit and VAT =				43041.65
2. Engineers Health and Safety				
Safety Vest	Nos.	270	2	540
Helmet	Nos.	1140	2	2280
Safety shoes	Nos.	2000	2	4000
Safety Goggles	Nos.	2100	2	4200
Hand Sanitizer (5 Liter)	Nos.	2600	1	2600
One time Face Mask	Nos.	500	1	500
Thermometer for measuring body temperature	Nos.	1000	1	1000
First Aid Box	Nos.	2500	1	2500
Torch Light	Nos.	1090	1	1090
Sub-total excluding over-head & profit =				18710
Sub-total Including over-head & profit =				21235.85
Add VAT with adjustment factor (VAT-7.5% &Factor-1.08108)				1721.82
Total for item 2 including over-head, profit and VAT =				22957.67
3. Training on Occupational Health and Safety, and COVID-19				
Train on correct use and disposal of personal protective equipment (PPE)	Nos.	20000	1	20000
Leaflet/poster for awareness among the workers, staffs and nearby communities	Nos.	5	100	500
Sub-total excluding over-head & profit =				20500
Sub-total Including over-head & profit =				23267.50
Add VAT with adjustment factor (VAT-7.5% &Factor-1.08108)				1886.55
Total for item 3 including over-head, profit and VAT =				25154.05
4. Waste Management, Potable Water Supply and Sanitation I	acility			
Supply of waste bins/pots for different wastes	Nos.	2400	10	24000
Cost for drinking water	Nos.	2	1500	3000
Cost for Sanitation facilities(hand tube well, latrine etc.)	Nos.	1	7500	7500
Cost for safety notices/signboards/protocol at site	Nos.	5	90	450
Total excluding over-head & profit=				34950

Mitigation and Monitoring Items	Unit	Cost/Unit	Total Unit	Total Cost		
Total Including over-head & profit=				39668.25		
Add VAT with adjustment factor (VAT-7.5% &Factor-1.08108) 3216.34						
Total for item 4 including over-head, profit and VAT =				42884.59		
Grand Total (Including Overhead, Profit and VAT 134037.968						
Note: Considering Over-head 3.5%, Profit - 10%, VAT 7.5%						

21. **Monitoring and Reporting:** The PIU of the project, under DGHS, will monitor the progress of EMPs implementation and the compliance performance of their contractors, through site inspections and document review. The PIU will prepare and submit environmental monitoring reports to ADB, semi-annually during construction activities and annually during operation. If any non-compliance is identified, ADB will work with MOHFW and DGHS to rectify, to the extent possible, any failure to comply with their environmental commitments in the loan agreement, and exercise remedies to re-establish compliance.

APPENDIX-1: LAYOUT PLAN OF SUBPROJECT COMPONENTS



Figure 1: Layout Plan for 10 Bed ICU/CCU (2nd floor) at Mugdha 500 Bed Hospital

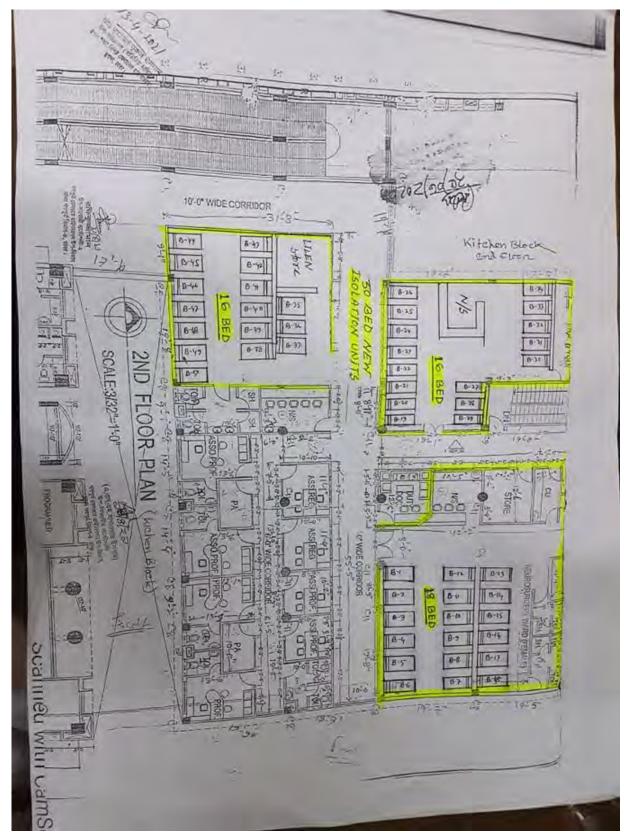


Figure 2: Layout Plan for 50 Bed Isolation Center at Mugdha 500 Bed Hospital

APPENDIX-2: SAMPLE MEDICAL WASTE MANAGEMENT PLAN

OBJECTIVE

Medical Waste which is also referred as clinical waste has to be handled and disposed in a proper manner to eliminate the possibility of injury or infection and safeguarding the environment as a whole. The impacts associated with improper Medical Waste Management (MWM) can damage the environment and affect public heath directly and indirectly.

Medical wastes contain both general wastes (app. 75-80%) and infectious wastes (app. 20-25 percent). Medical Waste constitutes a public health hazard, if not managed properly. Although majority of the medical waste is no more dangerous than household/municipal waste, the hazardous waste, if exposed to the people or environment in an untreated form, pose various kinds of danger.

The main objective of the Medical Waste Management Plan (MWMP) is to organize disposal of all wastes generated during construction in an environmentally acceptable manner specially consider the following:

- Health hazards of the project personnel as well as community people should not be occurred;
- Manage the wastes in such a way that environment (specially air, water, surrounding environment etc.) will not be polluted;
- Odor means bad smell should not be generated;
- Always friendly environment at the construction sites and construction camps;
- Any waste should not be disposed into the river and any water bodies to avoid water pollution;
- Any waste should not be burnt

STRATEGIES FOR MEDICAL WASTE MANAGEMENT


The major components of medical waste management include:

- Proper waste collection and segregation at source use of standardized color-coded bins for different wastes;
- Waste streams general, contaminated, cytotoxic/pharmaceuticals, body parts;
- Storage and transport cold storage for contaminated waste and body parts, transport in safe and leak proof containers;
- Waste treatment sterilization of contaminated waste (steam autoclave), incineration of cytotoxics, pharmaceuticals and body parts in incinerator meeting relevant standards and statues.

To perform a Medical Waste Management, several stages, need to be followed.

Stage 1: Collecting & Segregating

The biomedical waste has to be collected in containers that are resilient and strong from breakage during the handling process. Do not place sharps, used needles, syringes, or other contaminated tools in common waste disposal or recycle bin because the entire waste will be infectious by doing so. The segregation also needs to be performed between the liquid and solid biomedical waste products. Categorizing the medical waste with correct segregation to isolate and manage each waste in the proper way. For this purpose, the segregations come in colored waste containers, label coding and plastic bags. The simplest way to identify the different types of waste is to collect the various types of waste in separate containers or plastic bags that are color-coded and/or marked with a symbol.

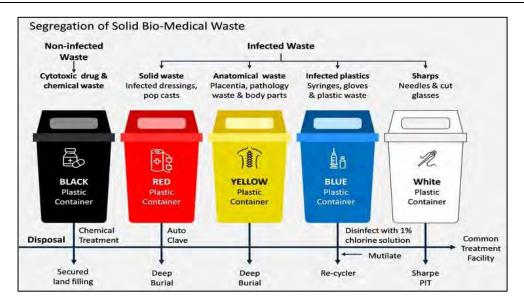

Stage 2: Storing & Transporting

Specific requirements for storage facilities, such as a secure area that is inaccessible to the general public, as well as separated it from areas for food consumption. The storage facilities also have to be accompanied with refrigerator or freezer unit that can be used with medical waste if necessary. Some facilities even provided special vehicles and protective devices to dispose, handling or transport the biomedical waste products. Remember to observe and keep maintaining the protective devices periodically so it won't be a source of transmitting the infections. Further recommendations should be followed by the ancillary workers in charge of waste collection:

- Wastes should be collected daily or as frequently as required and transported to the designated central treatment site.
- No bags should be removed unless they are labeled with their point of production (hospital and ward or department) and contents.
- The bags or containers should be replaced immediately with new ones of the same type.
- Special packaging requirements for off-site transport in general, the waste should be packaged
 according to the recommendations provided in sealed bags or containers to prevent spilling during
 handling and transportation. The bags or containers should be appropriately robust for their content
 (puncture-proof for sharps, for example, or resistant to aggressive chemicals). Bags and containers
 must be closed whenever they are two-thirds full. Never pile bags or empty them; grasp them from
 the top (never hold them against the body) and wear gloves.
- All waste bags or containers should be labeled with basic information on their content and on the
 waste producer. This information may be written directly on the bag or container or on preprinted
 labels, securely attached. For health care wastes, the following additional information should be
 marked on the label: waste category, date of collection, and place in hospital where produced (e.g.
 ward), and waste destination.

Stage 3: Treatment of Medical Waste

Incineration at high temperatures (over 1000°C) is one of the few technologies with which all types of health-care waste can be treated properly and it has the advantage of significantly reducing the volume and weight of the wastes treated. There are simple incinerator models for treating small quantities of medical waste. Some are available on the market, and others have to be built with local materials on the spot according to relatively simple plans. These incinerators consist essentially of one or two combustion chambers (the primary and secondary chambers) and a discharge chimney. The combustion and airborne emission control system is simple. If infectious medical waste is treated in small single-chamber or dual-chamber incinerators on site, fractions of waste such as drugs, chemicals, halogenated materials or wastes with high heavy metal content (such as batteries, broken thermometers, etc.) must not be treated in this type of facility.

Autoclaving is a thermal process at low temperatures where waste is subjected to pressurized saturated steam for a sufficient length of time to be disinfected (60 minutes at 121°C and 1 bar). Where prions (which cause Creutzfeldt- Jakob's disease) are present, a cycle of 60 minutes at 134°C is recommended, since they are exceptionally resistant. Efficiency tests (biological or thermal) must in any case be carried out regularly. Autoclaving is environmentally safe but, in most cases, itrequires electricity, which is why in some regions it is notalways suitable for treating wastes Small autoclaves are frequently used for sterilizing medical equipment, but the models used for treating healthcare wastes can involve relatively complex and expensive plants (with internal mixing, shredding and drying systems) requiring meticulous design, proper sorting and a high level of operating support and maintenance. Furthermore, the effluents must be disposed of carefully and properly monitored. And lastly, large autoclaves may require a boiler that generates several types of emissions, which have to be monitored. Once wastes have been processed in an autoclave, they are no longer infectious materials: they can be land filled with municipal refuse. Autoclaving is often used for pre-treating highly infectious waste before it is transported outside the hospital. This thermal process needs electricity and high installation cost.

Microwaving is another emerging technology to treat biohazard us waste, including material from healthcare facilities. Use of radiation to heat materials and destroy pathogens, can be combined with shredding to make material safe for disposal without modification. In microwave systems, disinfection occurs through the action of moisture and low heat. Microwave units usually operate at a frequency of 2450 MHz and the energy generates hot water and steam. It can be installed indoor with solid floor and require large electricity supply. It has the advantage of significantly reducing the volume and weight of the wastes treated up to 60-80% where autoclave can reduce to 50%.

Stage 4: Disposal of Medical Waste

Disposal in a sanitary landfill or waste burial pit: The disposal of untreated health-care waste in an uncontrolled dump is not recommended and must only be used as a last resort. It can be disposed of in a sanitary landfill, subject to certain precautions: it is important that health-care waste be covered rapidly. One technique is to dig a trench down to the level where old municipal refuse (over three months old) has been buried and to immediately bury health-care waste that is discarded at this level under a 2-metre layer of fresh municipal refuse. The following are the essential factors that must be taken into consideration in the design and use of a sanitary landfill

- · access must be restricted and controlled;
- · competent staff must be available;
- · the discarding areas must be planned;
- the bottom of the landfill must be waterproofed;
- the water table must be more than 2 meters below the bottom of the landfill;
- there must be no drinking water sources or wells in the vicinity of the site;
- · chemicals must not be disposed of on these sites;
- the waste must be covered daily and vectors (insects, rodents, etc.) must be controlled;
- The landfill must be equipped with a final cover to prevent rainwater infiltration; leachates must be collected and treated.

Purpose-built burial pit could also be used, preferably on the hospital site. Ideally, the pit should be lined with low permeability material such as clay to prevent the pollution of shallow groundwater and should be fenced in so as to prevent scavenger access. Health-care wastes must be buried immediately under a layer of soil after each unloading operation. It is suggested that lime be spread on the waste for added health protection (in the event of an epidemic, for example) or to eliminate odor. The pit should be sealed once it has been filled.

Disposal of liquid wastes in the sewage: There are two recommended ways to handle medical waste fluids: i. Collect fluids in a leak proof container, and solidified for autoclave treatment; ii. Thermally (autoclave) fluids then they be disposed into the sanitary sewer system. An extra precaution should be performed before pouring treated fluids in sewer because they may clog and leak.

Spill contingency plan: Surfaces contaminated with spilled or leaked biomedical waste must be decontaminated with a solution of industrial strength detergent to remove visible soil before being disinfected by one of the following methods:

- Steam for a minimum of 30 seconds.
- Rinse for at least three (03) minutes with a hypochlorite solution containing 100 parts per million (ppm) available free chlorine (note: one tablespoon per two (02) gallons of water is approximately 100 ppm available free chlorine), or rinse for at least three (3) minutes with an iodine solution containing 25 ppm available iodine.
- Use a chemical germicide that is registered by the Environmental Protection Agency (EPA) as a
 hospital disinfectant, following recommended dilutions and directions. Liquid waste created by
 these chemical disinfecting operations shall be disposed of into the sanitary sewage system.
- Employees cleaning spills of biomedical waste must wear appropriate personal protective equipment such as, but not limited to, gloves, gowns, laboratory coats, face shields or masks and eye protection. Spills should be reported to the respective Health and Safety Officer.


APPENDIX-3: COVID HEALTH AND SAFETY PLAN FOR THE CONSTRUCTION WORK

The contractors shall at all times be responsible to take all reasonable precautions to maintain the health and safety of personnel and that suitable arrangements are made for all necessary welfare and hygiene requirements and for the prevention of epidemics. However, a COVID-19 Health and Safety Advisory Guidance for Construction Workforce prepared by ADB, which may be further updated as the COVID-19 situation evolves by the contractor and get approval from the PIU. The guidance includes the protocols on the following:

A. Prerequisites for Reopening Worksite: Plan to open/reopen worksite at limited scale (i.e. only essential works at worksite). Map essential/unavoidable works that must be attended at this moment. Identify and engage essential labor force initially. Increase labor force step by step as necessary. Do not engage labor until: i. Conduct risk assessment of worksite and prepare plan as per H&S guideline; ii. Avoid labor intensive works as much as possible; iii. Ensure all to use the Personal Protective Equipment (PPE) as appropriate; iv. Engage health and safety supervisor to implement COVID-19 guidelines. Engage health worker for daily temperature check and record for workers; vi. Ensure all equipment and vehicles used are routinely disinfected; vii. Provide thermometer, soap, sanitizer, disinfectant, PPE at worksite/camp; viii. Place adequate washbasins, disinfectant tub, dispenser for sanitizer; ix. Engage contractor's EHS staff or assign an existing staff to handle COVID-19 in case if detected; x. Post enough COVID-19 awareness posters throughout the worksites; andxi. Maintain COVID-19 weekly monitoring and reporting mechanism at worksite; including any necessary actions to be taken.



B. Worksite Entrance Protocol: Everyone entering the worksite must wear a mask, gloves and hard shoes. Strictly follow and implement the EHS manual at worksite. The entrance of the worksite/camp site every personnel must wash their hands for 20 second with maintaining a distance of at least 1m (3 ft) from each other.

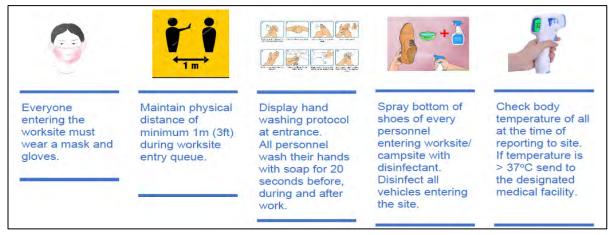

C. Worksite Management Protocol: A designated EHS and medical person should stay all time during work. The EHS/Medical person should also monitor campsite. He/she will be in charge of ensuring physical distances (minimum 1m) among workers, disinfecting surfaces that are commonly used and investigate worker's/site personnel health and safety.



D. Camp Management Protocol:

- 1. Provide soap, sanitizer, washing facility and safe water at the workers' dwelling. Encourage frequent hand washing.
- 2. Ensure separate covered waste bin for disposal of used PPEs.
- 3. Protect against heat, cold, damp, noise, fire, and disease-carrying animals.
- 4. Maintain good housekeeping and social distancing in kitchens, meal rooms, canteens.
- 5. Ensure personal distance at least 1m (3ft) during lunch, dinner and prayer.
- 6. Ensure ample ventilation at the camp.



E. Work at Site Awareness: Train workers on how to properly put on, use/wear, and take off protective clothing and equipment. The on-site EHS/Medical person should be in-charge of these trainings. These trainings must maintain the WHO's social distancing protocol. Make these trainings mandatory at worksites. Provide 10-15 minutes of a workday for such 'training and encouragement' activities.



Contractor should develop a preparedness and response plan by following the ADB guideline to prevent COVID-19 infection in the workplace. The preparedness plan will be submitted to PMU for approval. In addition to the ADB guideline, the government's Technical Guidance for Social and Institutional Containment and Prevention of Pandemic COVID-19 Infection issued on 11 May 2020 has also to be complied with.